




# ALUPROP

ALUMINIUM PROP

Flexible, lightweight  
and resistant

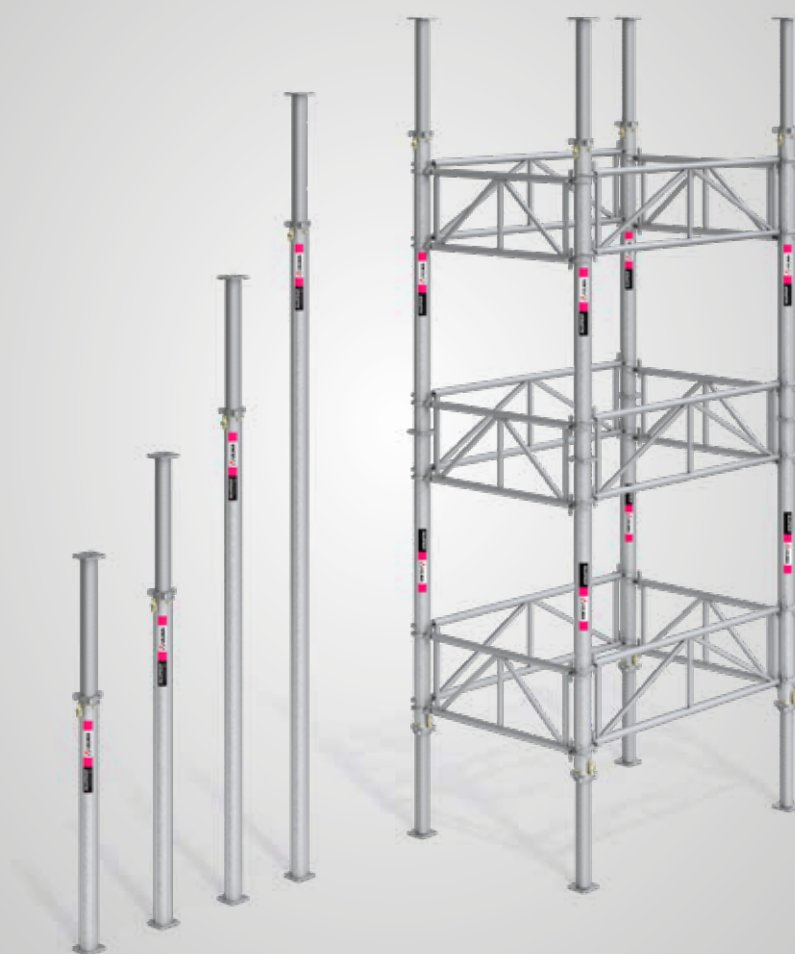



## Features



ALUPROP props and towers

- Approved and certified product.


Deutsches  
Institut  
für  
Bautechnik

### ALUPROP Prop

- Designed for shoring of slab formwork and shoring in general.
- The **lightness, great load capacity** and **multiple solutions** are its main features.
- **Maximum height** with single prop: 6 m (7 m with 1 m supplement).
- **Maximum load** with 6 m single prop:
  - European criteria (EN 16031): 26.1 kN.
  - American criteria (ANSI/ASSE A10.9.): 39.1 kN.

#### • Prop components

- 1 Base plate
- 2 Inner tube
- 3 Adjustment nut
- 4 Intermediate plate
- 5 Clic
- 6 Outer tube

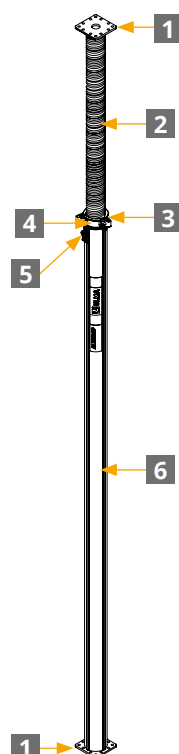


ALUPROP prop



## ALUPROP Towers

- Falseworks can be shaped by joining the ALUPROP props and the bracing frames. We can thus achieve **greater stability**, allowing the building of **high-rise falsework** and **increasing working loads**.
- Maximum height** permitted for ALUPROP towers: 12 m.
- Tower components:**
  - 1 Bracing frames
  - 2 Joined props

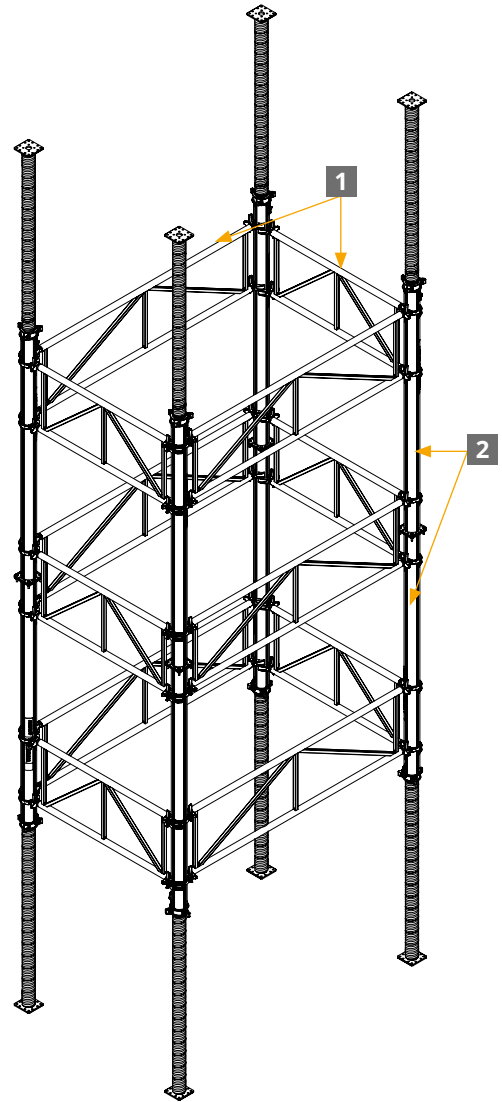





## Advantages

- **Lightweight**, made of aluminium.
- **Resistant**, great load capacity.
- Inner tube protected against disengagement of the outer tube.
- Simple and fast length regulation.
- Dual height regulation, thanks to the ALUPROP screw jack.
- **Self-cleaning thread**, to eliminate concrete sticking on the inner tube.
- Fastening click between outer tube and nut.
- Simple prop stripping thanks to the drive nut with holes and wings.



*Fastening click*



*ALUPROP prop with supplement*



*ALUPROP tower lifting*

- **Flexible:**
  - Braceable prop with bracing frames with tubes and bracing hooks.
  - Possibility of joining props. Allows the building of high-rise formwork.
  - Allows the placement of intermediate working platforms.
  - Falsework can be assembled at the ground level, horizontally. Favours ergonomics and workers' safety.






## Solutions


### Configurations

- **Prop joint:** Joint between the ALUPROP Props (Maximum height: 12 m).

- *With bolts*




- *With ALUPROP clamp*




- **Bracing between ALUPROP props and towers**

- *With bracing hook and tube*



- *With bracing frames*



### Slab formwork with ALUPROP



VR Table pre-assembled slab formwork with ALUPROP towers



VR Table pre-assembled slab formwork with ALUPROP prop





*ENKOFLEX timber beam formwork*



*CC-4 aluminium slab formwork*



*ENKOFORM HMK civil engineering slab formwork*

## Other shoring



*Shoring in bridges*



*Shoring in cut-and-cover tunnels*



*Shoring in single-sided wall formwork*



*Shoring in inclined walls*




## Basic components


ALUPROP 1.65-2.8	2220010	17.7
ALUPROP 2.2-3.7	2220020	21.6
ALUPROP 3.3-4.8	2220030	25.5
ALUPROP 4.5-6.0	2220040	29.6




ALUPROP spindle	2220200	5.8
-----------------	---------	-----




Supplement 1 m	2220055	4.5
----------------	---------	-----




ALUPROP clamp	2220080	1.1




Hexagonal screw M10x50 DIN933 8.8	0241051	0.044
Nut M10 DIN-934-5.6	0241000	0.01
Spring washer B10 DIN 127 ZN	9000001	0.001
Whaser A10 DIN 125	0241001	0.01




Bracing frame 0.75	2220140	10.2
Bracing frame 1.5	2220125	15
Bracing frame 1.57	2220130	15.4
Bracing frame 2.075	2220145	18
Bracing frame 2.32	2220120	19.4

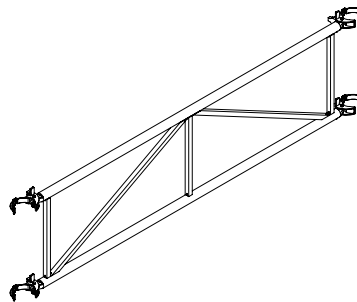


Fix bracing hook	2220075	2.2
Swivel bracing hook	2220100	2.3




Universal tripod	2220090	11.2
------------------	---------	------




Extending platform 1-1.6	2067035	12.6
Extending platform 1.5-2.35	2067048	17.3
Extending platform 2-2.7	2067043	20.6

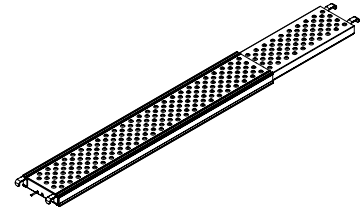


Trapdoor platform 1.5	2128152	19.3
-----------------------	---------	------




Platform 1.5	2127716	12.4
--------------	---------	------



ALUPROP Spanner	2220210	3
-----------------	---------	---



Pallet E1	1800000	53
-----------	---------	----





It's **all** about **trust**

---

[www.ulmaconstruction.com](http://www.ulmaconstruction.com)

**ULMA C y E, S. Coop.**  
Ps. Otadui, 3 - P.O. 13  
20560 Oñati, Spain  
T. +34 943 034 900  
F. +34 943 034 920



**IMPORTANT:**

Any safety provisions as directed by the appropriate governing agencies must be observed when using our products. The pictures in this document are snapshots of situations at different stages of assembly, and therefore are not complete images. For the purpose of safety, they should not be deemed as definitive. All of the indications regarding safety and operations contained in this document, and the data on stress and loads should be respected. ULMA's Technical Department must be consulted anytime that field changes alter our equipment installation drawings. The loads featured in this document, related to the basic elements of the product, are approximate. Our equipment is designed to work with accessories and elements made by our company only. Combining such equipment with other systems is not only dangerous but also voids any or all our warranties. The company reserves the right to introduce any modifications deemed necessary for the technical development of the product. All rights reserved. Neither all nor part of this document may be reproduced or transmitted in any way by any electronic or mechanical procedure, including photocopy, magnetic recording or any other form of information storage or retrieval system without the written permission.

© Copyright by ULMA C y E, S. Coop

02H337ENM